

The Process of Installing HP 9000 / 10000 Bulk Ink System


Step 1	Plug each cartridge in its corresponding slot.
Step 2	Locate and both bottle units on the top of each side of a printer by removing an adhesive tapes on the bottom of bottle unit.
Step 3	Detach the front cover of each bottle unit with a screw
Step 4	Connecting ink tube between bottles and cartridges as the following part 1 (how to connect ink tube)
Step 5	Attach the front cover of both bottle units with a screw again
Step 6	Fill ink into each bottle and wait till ink is completely filled in each cartridge for about 30 minutes.
Step 7	Put something like paper in the sensor of ink cartridge cover of a printer to make the printer recognize the ink cover close.
Step 8	Follow the part 2(how to set up the NON-HP cartridges) (remove paper from the sensor of ink cartridge cover to open it)
Step 9	After setting up NON-HP cartridge, put paper in the sensor.
Step 10	Start to print

Part 2. How to Set Up NON-HP Cartridges

When the Bulk Ink System are used:

- When using the bulk ink system, the warranty of the printer is invalidated
- The printer cannot correctly recognize the remaining ink quantity.
in this case, the quantity is displayed as "???"

To use the bulk ink system

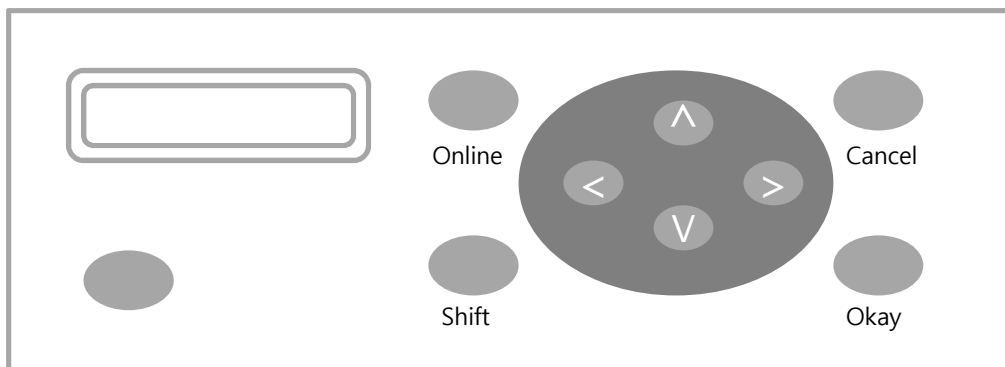

1. The printer recognizes an empty ink cartridges and displays the message

OPEN R INKCOVER
REPLACE XX INK

XX : Ink name

K : Black

C: Cyan

M: Magenta

Y: Yellow

Lm: Light Magenta Lc: Light cyan


2. Press the **V** key and the **cancel** button at the same time until the message change

3. The Guidance message is displayed

SEE CHAPTER 12
IN USER'S GUIDE

4. Refer to the procedures described in the next page.

5. Press  to continue



ACCEPT : OK
REJECT : CANCEL

6. Press  to continue



SEE WARRANTY
CONDITIONS CONT?

7. Press  to continue



SEE SAFETY
CONDITIONS CONT?

8. The guidance message for final confirmation is displayed



CONFIRM NON-HP *
REPLACE

Choose the item CONFIRM NON-HP using  KEY and press the OK key.

The printer warranty and safety issues described above are deemed to be approved, and the use of the Bulk ink system becomes available

9. The above procedure should be repeated with each cartridges.